









Standby





# **750 KVA**

3 PHASE 50Hz

GENERATING SET MODEL JP-750		
Output Ratings	Prime	
380-415 V, 3 ph, 50 Hz, 1500 rpm	750 KVA	

380-415 V, 3 ph, 50 Hz, 1500 rpm	750 KVA	825 KVA
	600 KW	660 KW
380-415 V, 3 ph, 60 Hz, 1800 rpm	750 KVA	825 KVA
	600 KW	660 KW

# **ENGINE/ TECHNICAL DATA**

**Compression Ratio** 

Frequency and Engine Speed

Ratings at 0.8 Power Factor

Engine Make	Perkins	
Engine Model	4006-23TAG2A	
Governing Type	Electronic	
Number of Cylinders	6	
Cylinder Arrangement	Vertical in line	
Bore and Stroke mm	160 X 190	
Displacement/ Cubic Capacity litres	22.9	
Induction System	Turbocharged, air to air charge cooled	
Cycle	4 stroke	
Combustion System	Direct Injection	

Gross Engine Power kW(hp)	705(945)	786(1054)
Fuel Consumption @50% load L/hr @75% load L/hr	208 204	212 212
@100% load L/hr	203	210
Total Lubrication System Capacity litres	113.4	113.4
Total Coolant Capacity (inc. radiator) litres	105	105
Exhaust Temperature: °C	555	481

Image is for Illustrative purpose only





13.6:1

60Hz & 1800rpm

50Hz & 1500rpm

# 60Hz

**750 KVA** 

**3 PHASE** 

#### **ALTERNATOR DATA**

Make	UPS/ Leroy Somer	
Model	UPS404G/LSA (TAL) 49.1	
No. of Bearing	s 1	
Insulation clas	s H	
Wires	6/12	
Ingress Protec	tion IP23	
Excitation Syst	em Shunt	
Winding Pitch	2/3	

Overspeed	2250 mn <sup>-1</sup>
Voltage Regulation (steady)	±1%

#### **CONTROL PANEL**

Make	DeepSea
Model	7000 Series

The DSE 7000 series is an Auto Start Control Module for single genset applications. It includes a backlit LCD display which clearly shows the status of the engine all the times. This module can either be programmed using the front panel or by using the DSE configuration suite PC software.

# Metering and Alarm Indications:

- Generator frequency
- Underspeed, Overspeed
- Generator volts (L-L-L-N)
- Generator current
- Engine oil pressure
- Engine coolant temperature
- Hours run counter
- Battery volts
  - Fail to start/stop Emergency stop
- Failed to reach loading voltage/frequency
- Charge fail
- Low DC Voltage
  - CAN diagnostics and CAN fail/error

# STANDARD SPECIFICATIONS

**750 KVA** 

3 PHASE 50Hz

#### 1. ENGINE

Perkins four stroke heavy duty high performance industrial type diesel engine

#### 2. ENGINE FILTRATION SYSTEM

- · Cartridge type dry air filter.
- Two cartridge type fuel filter.
- Full flow lube oil filter. All filters have replaceable elements.

#### 3. COOLING RADIATOR

Radiator and cooling fan, complete with safety guards designed to cool the engine at high ambient temperatures (consult your dealer for de-ration factors)

#### 4. EXHAUST SYSTEM

Exhaust gas flow Maximum allowable back pressure 31..3 (m3/min) 18.0 (kPa)

### 5. CIRCUIT BREAKER TYPE

3 pole MCCB. (4 pole is optional)

### 6. FUEL SYSTEM

The baseframe design is incorporated with an integral fuel tank with a capacity of approx.. 8 hours running at Full load. The tank is supplied complete with fill cap breather, fuel feed and return lines to the Engine and the drain plug

#### 7. ALTERNATOR

#### 7.1 INSULATION SYSTEM

- The insulation system is Class H.
- All windings are impregnated in either a triple dip thermoset-Ting liquid, oil and acid resisting polyester varnish or vacuum pressure impregnated with a special
- Heavy coat of antitracking varnish additional protection Against moisture or condensation.

#### 7.2 AUTOMATIC VOLTAGE REGULATOR (AVR)

The fully sealed Automatic Voltage Regulator maintains

The Voltage Regulation at ±1%. Nominal adjustment by means of a trim pot incorporated on the AVR.

### 8. MOUNTING ARRANGEMENT

#### 8.1 COUPLING

The Engine and Alternator are directly coupled by means of an SAE flange. The Engine flywheel is flexibly coupled to the Alternator rotor.

#### **8.2 ANTI-VIBRATION MOUNTING PADS**

Anti-Vibration pads are affixed between Engine/Alternator feet and the Baseframe thus ensuring complete vibration isolation of the rotating assembly.

#### 8.3 SAFETY GUARDS

The Fan & Fan Drive along with the battery Charging Alternator are Safety Guard protected for personnel

# 60Hz

750 KVA

**3 PHASE** 

# 9. FACTORY TEST

- The Generating set is load tested before dispatch
- · All protective devise control functions and site load conditions are simulated. The generator and its systems are checked before dispatch.

### 10. EQUIPMENT FINISHING

All mild steel components are fully degreased and painted with powder coated paint to ensure maximum scuff resistance and

#### 11. DOCUMENTATION

Operation & Maintenance manual, Circuit wiring diagrams and Commissioning/ Fault Finding instruction leaflets are accompanied with the Generator.

# 12. QUALITY STANDARDS

The equipment meets the following standards, BS4999, BS5000, BS5514 IEC 60034, VDE0530, NEMA MG 1.22 and ISO 8528.

#### 13. WARRANTY


All of the Generating sets are covered under a warranty policy For a period of 12 months or 1000 working hours. Warranty of the equipment is in line with manufacturers warranty terms & conditions. (check warranty statement for more details, as it may vary for different countries.)

In line with the continuous product development, we reserve The right to change specifications without notice.


# STANDARD GENERATOR DIMENSION AND WEIGHT

#### Silent Type (with Soundproof Canopy)



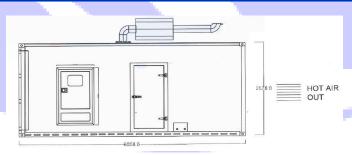

Open Type (without Soundproof Canopy)



: +971 6 741 0802, M +971 5 2641 4219 Fax : +971 6 740 8056

PO BOX: 3794, Ajman, UAE

E-mail: info@iimenpower.com Web: www.jimenpower.com